


Orbital Series • Large Format Orbital Sealers

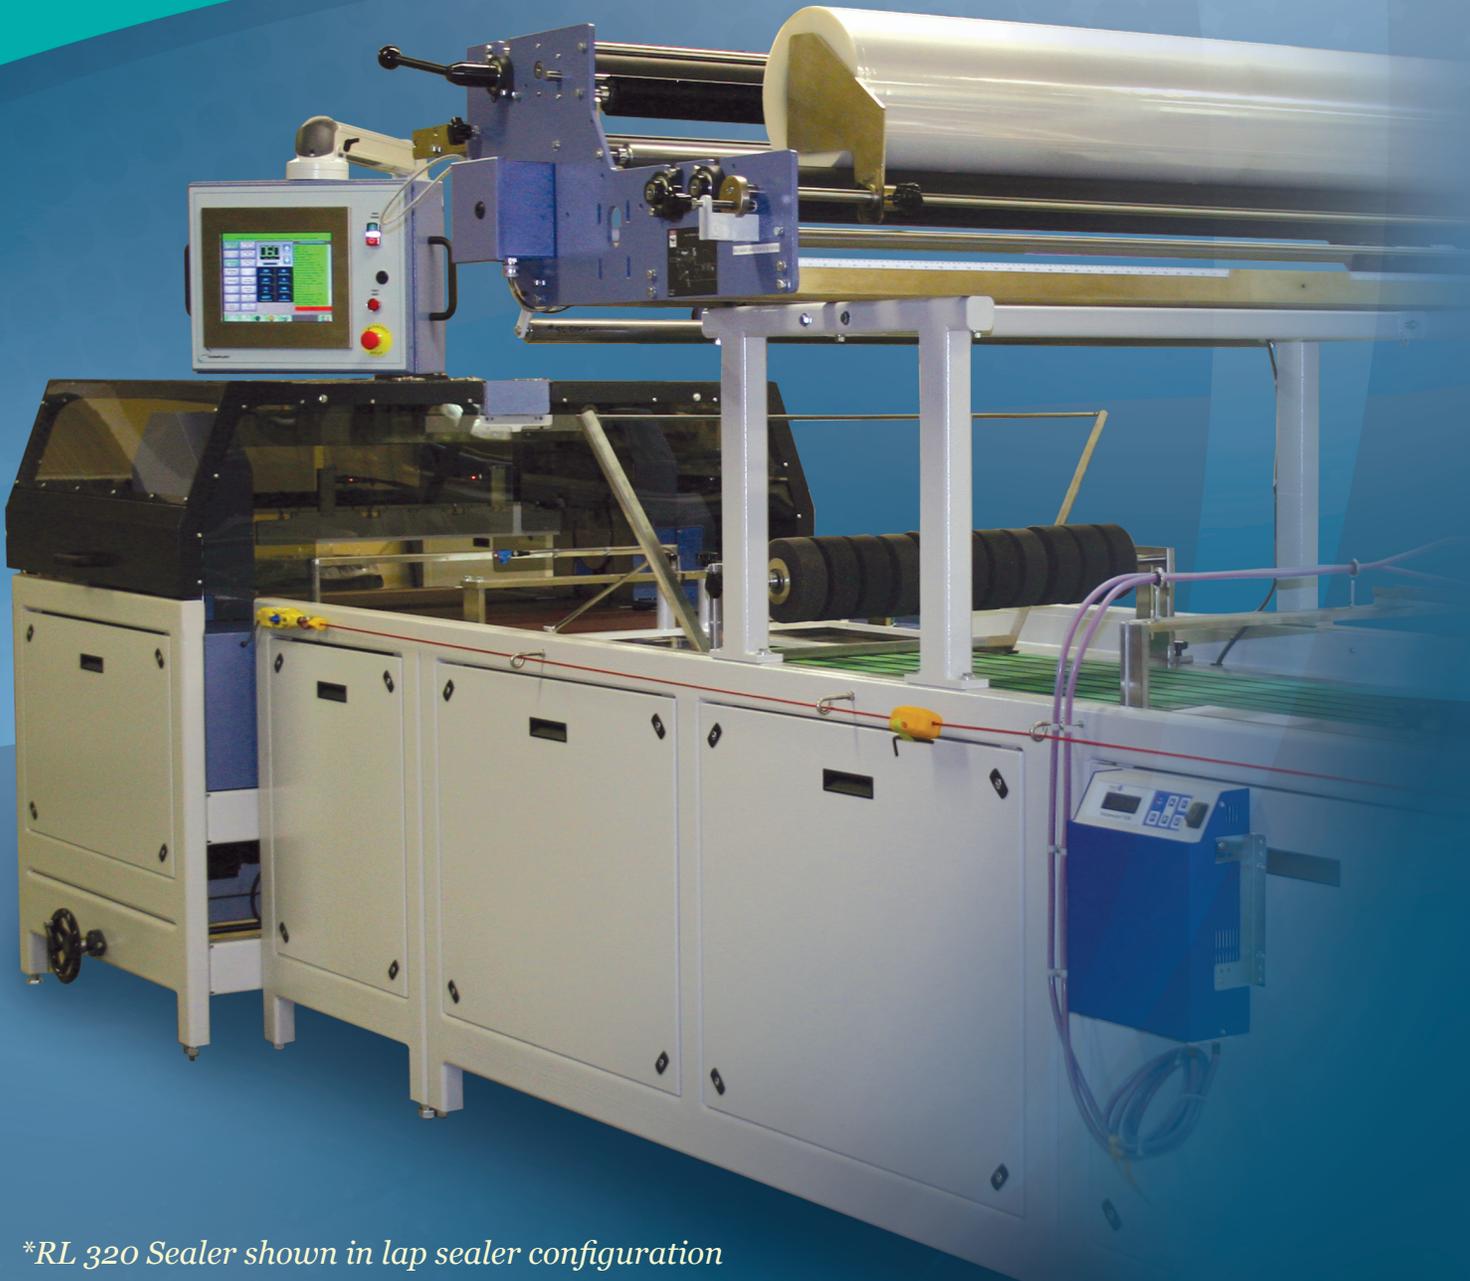

**RL 320 Sealer shown in lap sealer configuration*

- High Speed Orbital Sealing Head
- Modular Design offers Side Sealer and Lap Sealer Configurations
- Intellitouch Controls Package
- Multiple Infeeds available for automatic product handling

MADE IN USA



High Performance Automatic Shrink Packaging Systems

Orbital Series • Large Format Orbital Sealers

Conflex® Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

High Speed...and Flexible

The Orbital Series of orbital seal head wrappers is built for high speed flexibility. It is designed on a modular platform to handle a full range of large format to small product. Also able to be built as either a lap seal wrapper or a side sealer. The intellitouch controls package gives the user unparalleled ease of use while handling the accurate servo motion.

Conflex® Orbital Series Features and Benefits

- **Ambidextrous Operator Controls** – located on a swing arm for flexibility
- **Modular System** – Allows for an unprecedented number of infeed system pairings
- **Orbital Seal Head** – Servo Operated, Fast and Flexible
- **Sealing Options** – Can be built as either a lap sealer or side sealer
- **Intellitouch Controls Package** – On board Training Videos, electrical schematics ensure operator ease of use
- **Large Format** – Can be built to handle the largest packages
- **UL Listed Electrical Panel** - Recognized quality
- **Casters and Leg Levelers** – Standard equipment
- **Multiple Options Available** – for customized operations


Options Available

- **Voltage changes**
- **Stainless Steel Construction**
- **Custom Film Sealing packages**
- **Custom Product Guiding and more...**

Conflex® Orbital Series Specifications

Electrical Requirements:	230 Volt, 30 Amp, 3 Phase
Air Requirements:	None
Film Requirements:	Single wound or Center-fold (depending on machine style)
Film Speeds:	150 feet per minute
Seal Bar Width:	32"
Maximum Product Size:	30" Wide x 5" High
Deck Height on Casters:	36.5"

Conflex® Orbital Series Plan and Elevation View

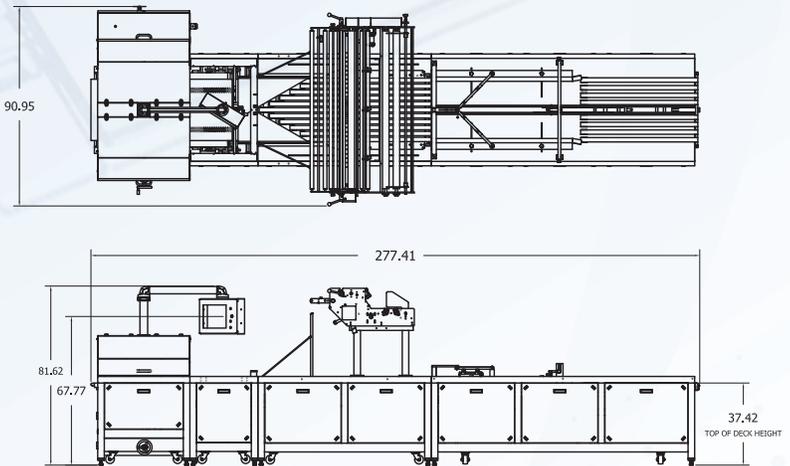

**Shown with optional product spacing infeed*

The Conflex® engineering department is available to customize machinery for special product applications.

Distributed By:



Conflex Incorporated
Manufacturing Facility:
W130 N 10751 Washington Dr.
Germantown, WI 53022

Toll Free: 800-225-4296
Fax: 262-512-1665
Email: info@conflex.com
www.conflex.com

