


~~E-250 AC~~ / E-260 A

AUTOMATIC L-SEALERS

**PRECISION ENGINEERING
DELIVERS FLEXIBILITY.**

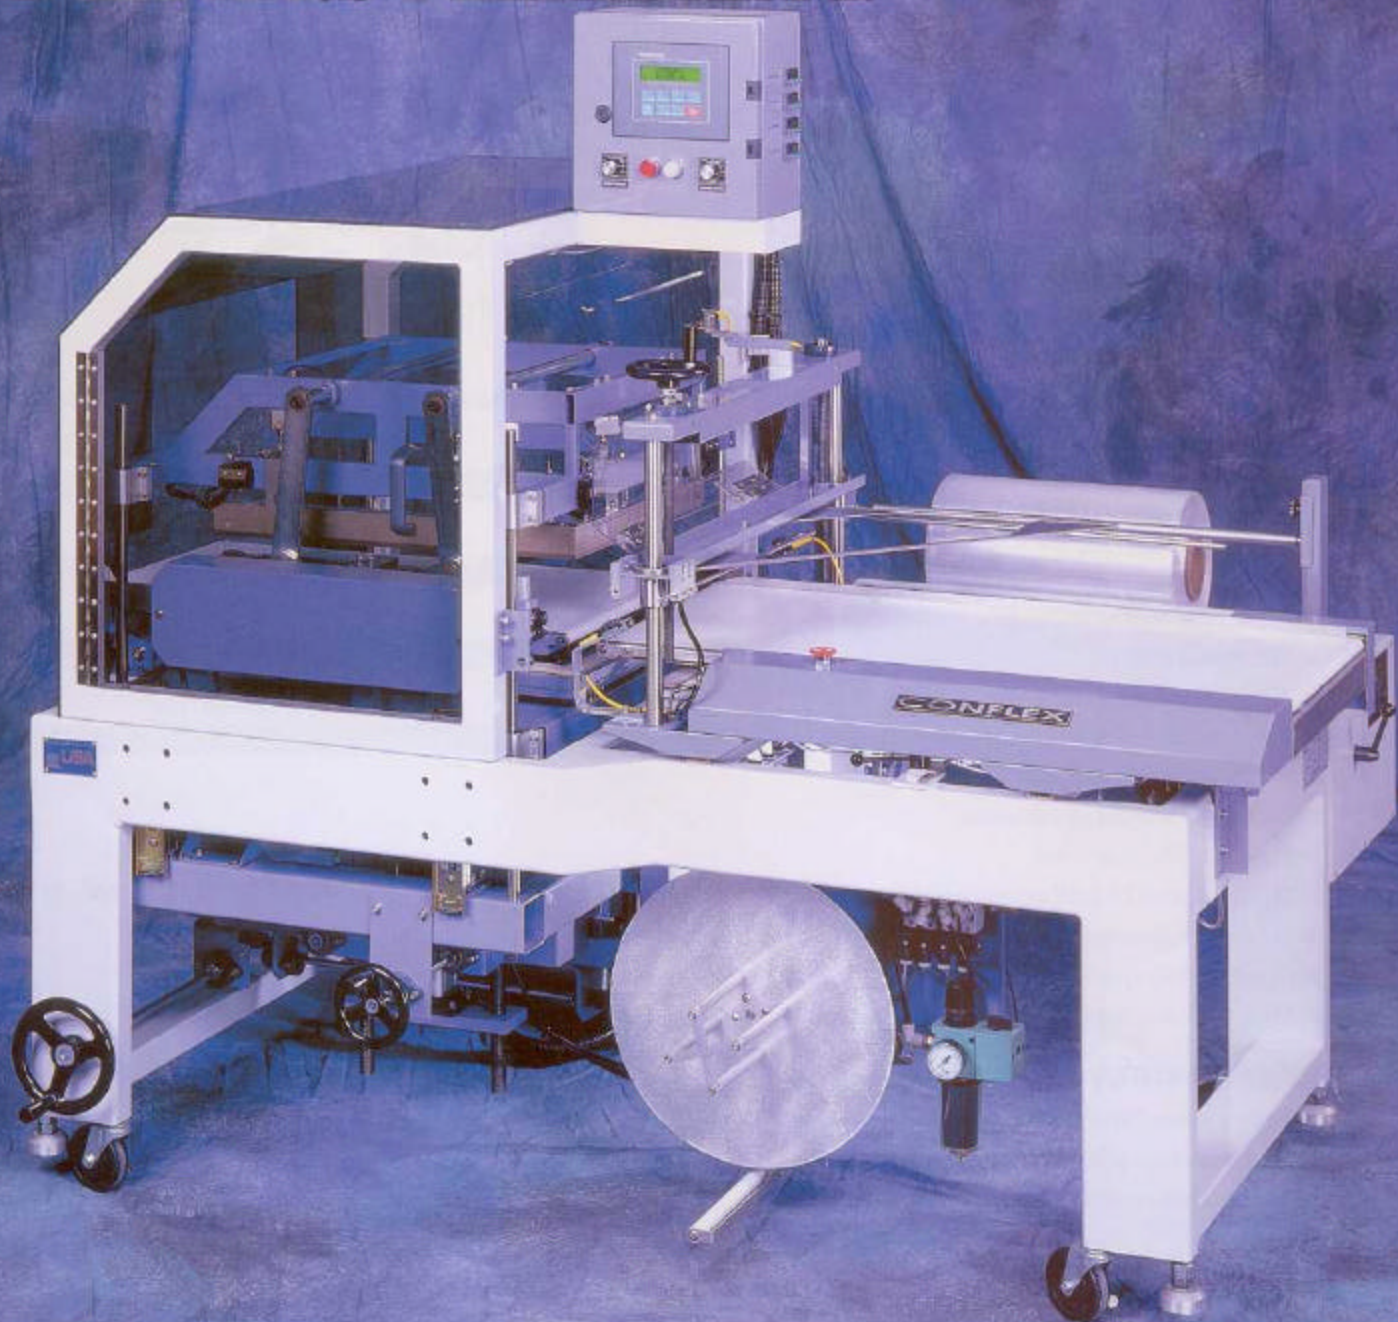


Our E-250 AC and E-260 A are engineered for flexibility with logic and precision. As product is fed onto the conveyor, electric eyes measure and advance it to the centerfolded film and vertical posi-action sealing area. To prevent the next package from entering during the sealing cycle, the belt advance is temporarily deactivated. When the sealing jaw opens, the advance is reactivated and the wrapped product is discharged into the shrink tunnel. It's logical. It's precise. It's flexible.



MADE IN USA

E-250 AC / E-260 A

FULLY AUTOMATIC L-SEALERS

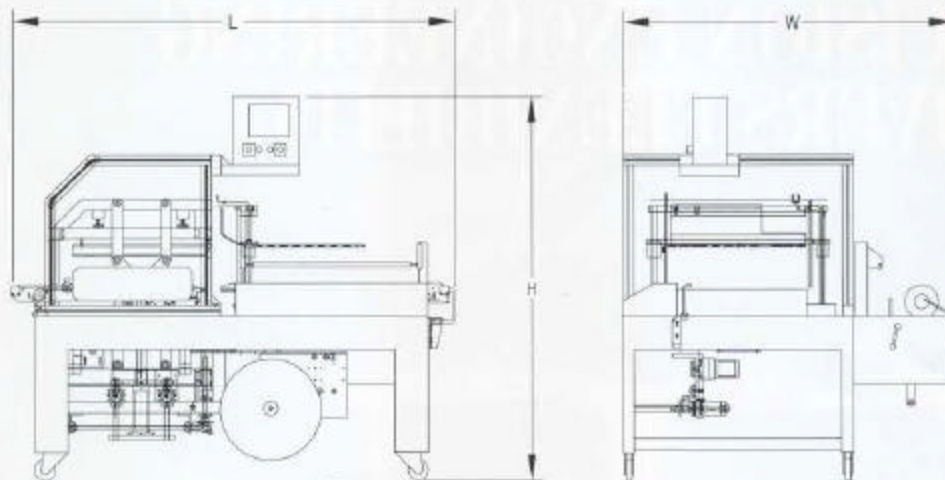

Standard Features:

- ▶ PLC touch pad, eye level mount
- ▶ Tooled steel hot knife sealing system eliminates wire replacement
- ▶ Lower heated seal pads
- ▶ Fully automatic package length adjustment via horizontal or vertical electric eyes
- ▶ Film selvage winder
- ▶ Adjustable height legs and casters
- ▶ Waist level film cradle with power unwind
- ▶ Vertical posi-action seal head
- ▶ Perforator wheels for air evacuation
- ▶ Film miser/Film support bar
- ▶ Closing conveyor for small product transfer*
- ▶ Variable speed conveyors w/soft start
- ▶ Adjustable center seal and stroke
- ▶ Scrap break detect system

Versatility:

- ▶ Product is transferred by conveyor belt -no pusher
- ▶ Seals most films - polyolefin, PVC and polyethylene
- ▶ Smooth product transfer allows wrapping of non-rigid products
- ▶ Fully automatic operation requires little or no operator assistance
- ▶ Extended exit conveyor for smooth product discharge

Specifications:

	E-250 AC	E-260 A
Seal Dimensions	19"W x 24"L	24"W x 32"L
Machine Dimension	78"L x 60"W x 68"H	90"L x 66"W x 68"H
Net Weight	900 lbs.	1200 lbs.
Max. Pkg. Ht.	10" w/center seal	10" w/center seal
Max. Film Width	27"	34"
Electrical	230V, 12A 1ph	220V, 12A 1ph
Caster Ht.	34"	34"
Air requirements (min.):	1CFM @ 80 P.S.I.	1CFM @ 80 P.S.I.

Options:

- ▶ Pneumatic hole punch
- ▶ ~~Product staging~~
- ▶ Wide band seal system
- ▶ Print registration
- ▶ Anti-stat system
- ▶ Film centerfolder
- ▶ Cassette/CD hopper
- ▶ Custom infeeds

*Optional on E260A model

Distributed by:

The engineering department is available to customize options for various product applications.

Conflex Incorporated.
 Manufacturing Facility:
 6637 N. Sidney Place
 Milwaukee, WI 53209
 1-800-225-4296
 Fax: 414-228-4088
 E-mail: conflex@excepc.com

REV 5/00

