

RS™ Series • High Capacity Orbital Side Seal Wrapper

Robust High Capacity Design built for the Ultimate Performance in today's production environments that demand Technology driven Flexibility.



**RS 320 Sealer shown in Side Sealer configuration and optional items*

Standout Features of the RS-Series

- Large Format Servo Operated Orbital Sealers
- High Capacity Film Cradle
- Modular Design offer Side Sealer and Lap Sealer Configurations
- Intellitouch Controls Package with Swing Arm Access
 - available in multiple electronic brands
- Multiple Infeeds Styles available for automatic product handling

MADE IN USA



High Performance Automatic Shrink Packaging Systems

RS™ Series • High Capacity Orbital Side Seal Wrapper

Conflex® ... Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

Speed and Versatility in One Durable Machine

Conflex RS™ Series Side Seal Wrappers offer the user blazing speeds and massive package size range in one machine platform. The modular servo motor controlled orbital style head is a Conflex™ exclusive design and can be used in both side sealer and lap sealer configurations. Available in up to a 32" seal bar format the package size range is tough to beat in a machine with this speed range. Servo motion and a variety of infeeds available make this an extremely versatile machine to fit into any production line. Plus, it's straightforward design and rugged tubular steel construction ensure years of dependable use.

Conflex® RS Series Features and Benefits


- **Multi Axis servo package** – Minimizes moving parts and maximizes flexibility
- **Intellitouch Controls and Large 12" HMI Touchscreen** – For ease of operation
- **Servo-Controlled Orbital Seal Knife** – For Precision seal placement and Speed!
- **High Capacity film Cradle** – Dual footage roll capacity for maximum run time
- **Triple safety system** – Protects operators and promotes a safe work environment
- **Patented Side Seal Features** – A Conflex™ exclusive design, proven and dependable
- **Supports a wider range of applications** – Up to a 32" wide orbital seal head to handle the largest packages
- **UL Listed Control Panel** – Standard Equipment
- **Casters and Leg Levelers** – Always Included
- **Many More Options Available** – 30 Years of product handling experience to rely on

Conflex® RS-320 Specifications

Electrical Requirements:	220 Volt, 30 Amp, 3 Phase
Air Requirements:	80 psi, 3 cfm
Film Requirements:	Up to 32" wide Center-folded roll, 13" Diameter
Seal Bar Width:	Up to 32"
Gross Weight:	2,400 lbs. (includes infeed)
Deck Height on Casters:	36.5"
Package Dimensions:	3" L to Infinite Length 2" W to 31" W 1/8" H to 7" H

*May require additional options to handle full size range

Conflex® RS-320 Series Plan View* (Shown with optional infeed)

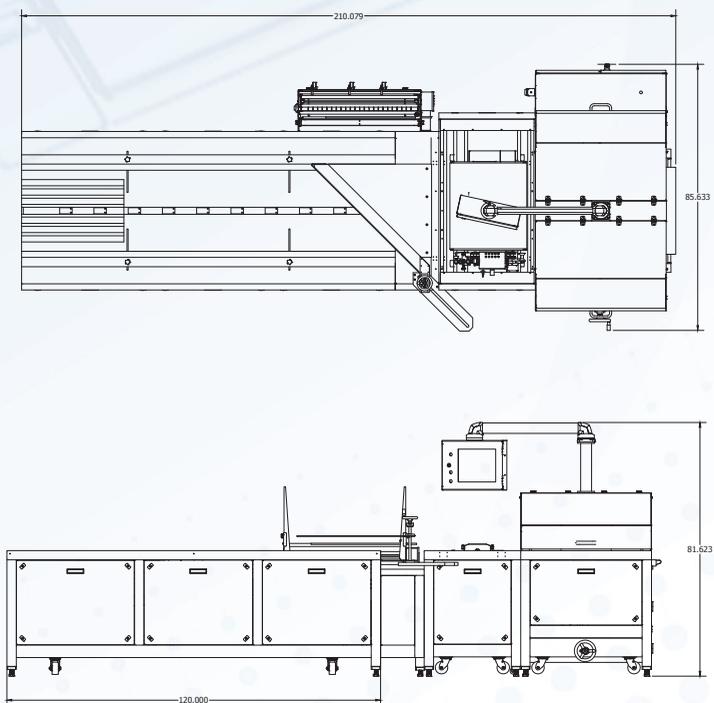

The Conflex® engineering department is available to customize machinery for special product applications.

Distributed By:



Conflex Incorporated
Manufacturing Facility:
W130 N10751 Washington Dr.
Germantown, WI 53022

Toll Free: 800-225-4296
Fax: 262-512-1665
Email: info@conflex.com
www.conflex.com

