

# ServoFlex™ Series • Horizontal Lap Seal Wrapper

*Innovative Design Incorporates Servo Technology  
for the Ultimate Performance and Flexibility*



*Use this lap seal wrapper and experience  
significant film savings in addition to  
improved sustainability.*

**MADE IN USA**



High Performance Automatic Shrink Packaging Systems

# ServoFlex™ Series • Horizontal Lap Seal Wrapper

## Conflex® ... Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge servo technology to take on the toughest shrink packaging challenges.

### Speed and Versatility in One Durable Machine

The Conflex ServoFlex™ Series Horizontal Form Fill and Seal Wrapper with leading-edge servo technology offers blazing speeds of up to 100 feet of film per minute, precision lap sealing capability, and the ultimate in packaging flexibility. The ServoFlex Series integrates seamlessly into existing lines, is easy to operate, and features hand-wheel adjustable controls and electronic eye sensors for maximum efficiency. Plus, its simple design and rugged heavy-duty steel construction ensure years of dependable use.

### Conflex ServoFlex Series Features and Benefits

- **3 Axis servo package** - Minimizes moving parts and maximizes flexibility
- **Large 12" full color touch screen** - For ease of operation
- **Reciprocating, servo-controlled hot knife seal system** - Precision seal placement with fewer moving parts
- **Cradle style powered feed** - Easy to load with fast change overs
- **Triple safety system** - Protects operators and promotes a safe work environment
- **Patented Self-centering/height-limiting seal bar** - Ensures excellent uniform shrinks; requires no tools to adjust and increases line speeds
- **Supports a wider range of applications** - Infinite length and 7 1/2" height capabilities
- **Multiple options** - Adjustable height film former, thermal bottom seal, 5' or 10' infeed extensions, 440V operation, card-style guides and more and custom infeeds


### Conflex® ServoFlex Series Specifications

Electrical Requirements	220V, 20 Amps, 440V, 1 Phase
Air Requirements	60 psi, 1 cfm
Film Requirements	One roll, single wound
Seal Bar	16", 20" wide
Maximum Film Width	34", 38"
Maximum Roll Diameter	13"
Overall Machine Dimensions	109" L x 56" W x 62" H (includes infeed)
Gross Weight	1,800 lbs. (includes infeed)
Maximum Operating Speeds	100' film per minute
Deck Height on Casters	36.5"
Package Dimensions	3" L to Infinite L 2" W to 13 1/2" W** 1/8" H to 7 1/2" H

\*May require additional components and set-up time to run the entire size range

\*\* Product dependent

### Conflex® ServoFlex Series Plan View\*

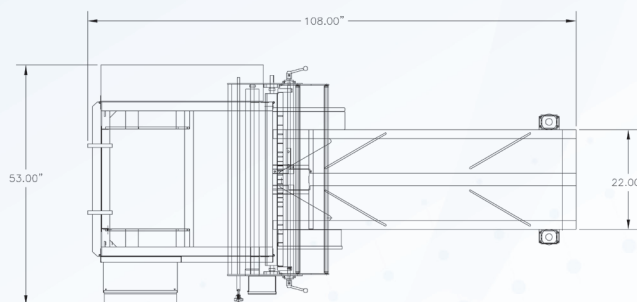

\* Shown with 5' infeed

The Conflex® engineering department is available to customize machinery for special product applications.



Conflex Incorporated  
Manufacturing Facility:  
W130 N 10751 Washington Drive  
Germantown, WI 53022

Toll Free: 800-225-4296  
Fax: 262-512-1665  
Email: [info@conflex.com](mailto:info@conflex.com)  
[www.conflex.com](http://www.conflex.com)



Distributed By: