


 **Vortex Series** • High Efficiency Shrink Tunnels



Vortex 72 (Left to Right Product Flow)

Shown with Optional Polyethylene Kit

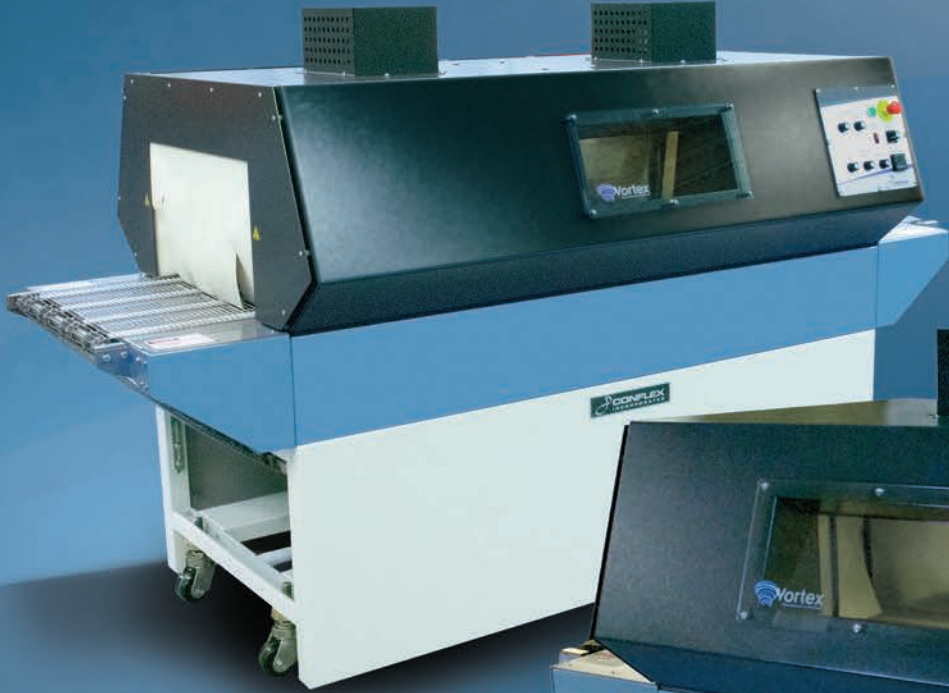

Vortex 48



MADE IN USA

High Performance Automatic Shrink Packaging Systems

Conflex® Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

Highly Efficient...and Flexible

The Conflex® Vortex Series of shrink tunnels puts the heat where it belongs...in the chamber...not circulating through baffles heating up areas of the tunnel that don't need heat. This gives the user excellent shrink appearance while minimizing power consumption. The consistent tunnel air temperature and uniform airflow offer superior shrink results.

Conflex® Vortex Series Features and Benefits

- **Low Power Consumption** - Easy on your electrical bill for quick ROI.
- **Viewing Window** - Standard feature because you need to see the product to make it look good.
- **Cool to the touch** - Efficiently insulated to save power and keep the heat where it belongs.
- **UL listed Electrical Panel**
- **Variable Speed Conveyor** - Speeds to 100 feet per minute.
- **Independently Adjustable Air Flow Fans** - Gentle air flow for light product to a high air flow for products that need it.
- **Lighted Chamber** - Makes it easier to perfect the appearance of the package.
- **Casters and Leg Levelers** - Standard Equipment.
- **Lower Shrink Temperatures** - Efficient heat vortex design
- **Durable Stainless Steel Conveyor Belt** - Standard

Conflex® Vortex Series Specifications


	V48	V72	V96
Elec. Requirements:	230 Volts, 28 Amps, 3 phase	230 Volts, 50 Amps, 3 phase	480 Volts, 34 Amps, 3 phase
Air Requirements:	None	None	None
Chamber Dim.:	25"W x 13"H x 48"L"	25"W x 13"H x 72"L"	25"W x 13"H x 96"L"
Conveyor Dim.:	24"W x 80"L	24"W x 104"L	24"W x 127"L
Machine Dim.:	81" L x 51"W x 60"H	105" L x 51"W x 60" H	129"L x 51"W x 60"H
Max. Op. Speeds:	100 feet per min.	100 feet per min.	150 feet per min.
Deck Ht. on Casters:	34" - 39"	34" - 39"	34" - 39"

Options Available


- **480 volt / Export Voltages**
- **Composite Conveyor Belt / Teflon Mesh Conveyor Belt**
- **Cooling Fans for Polyethylene**
- **Deck Height Extension Kit**
- **Right Hand Controls**
- **Additional Viewing Window**
- **Stainless Steel Construction**

Conflex® Vortex Series Plan View


Vortex 48

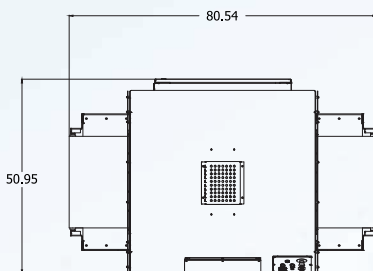

Vortex 72

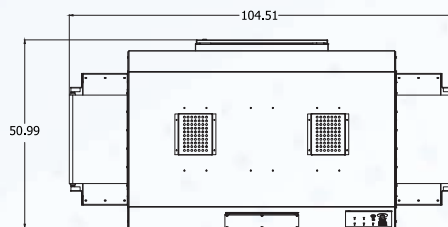

Vortex 96

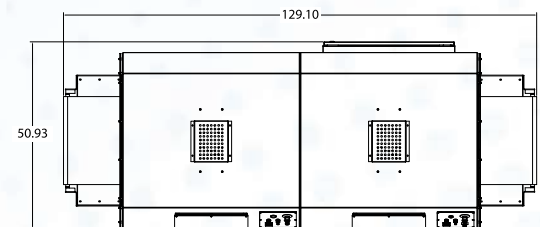

The Conflex® engineering department is available to customize machinery for special product applications.



Conflex Incorporated
Manufacturing Facility:
W130 N 10751 Washington Dr.
Germantown, WI 53022

Toll Free: 800-225-4296
Fax: 262-512-1665
Email: info@conflex.com
www.conflex.com



Distributed By: